



Micro Communications, Inc.
A MICROWAVE TECHNIQUES COMPANY

UHF 8th Order Dual Mode Reflective DTV/DVB-T Mask Filter


- **Thermally Adjusted**
- **DTV Mask Compliant**
- **3-1/8 EIA In and Out
Other Connectors Available**
- **Thermally Stable Invar
Available upon request**

Electrical Specifications

Filter Type	Band Pass Dual Mode
Order	8th
Frequency Range	470- 862 MHz
Impedance	50 Ohm
Maximum RMS Power	20kW(30kw Max- 4-1/16EIA)
Connectors	3-1/8 EIA(Male)
Channel Bandwidth	6 MHz (8MHz Optional)
VSWR	1.08:1
Insertion Loss	@ fc=.35dB
Frequency Response	6MHz Pass Band
fc± 3.5 MHz	≤6.0dB
fc± 4.0 MHz	≤12.0dB
fc± 4.5 MHz	≤23.0dB
fc± 5.0 MHz	≤27.0dB
fc± 6.0 MHz	≤37.0dB
fc± 9.0 MHz	≤65.0dB
Group Delay Variation	≤350 ns
Normal Operating Temp.	Ambient to 150°F (65°C)

Mechanical & Environmental Specifications

Dimensions -Typical @CH 33	16.5"Ø x 60" LG	
Materials	Outer Conductor	6061 Aluminum
	Finishing	Long Lasting Black Paint
	Hardware	Stainless Steel
Temperature Range	-10° to +50°C	

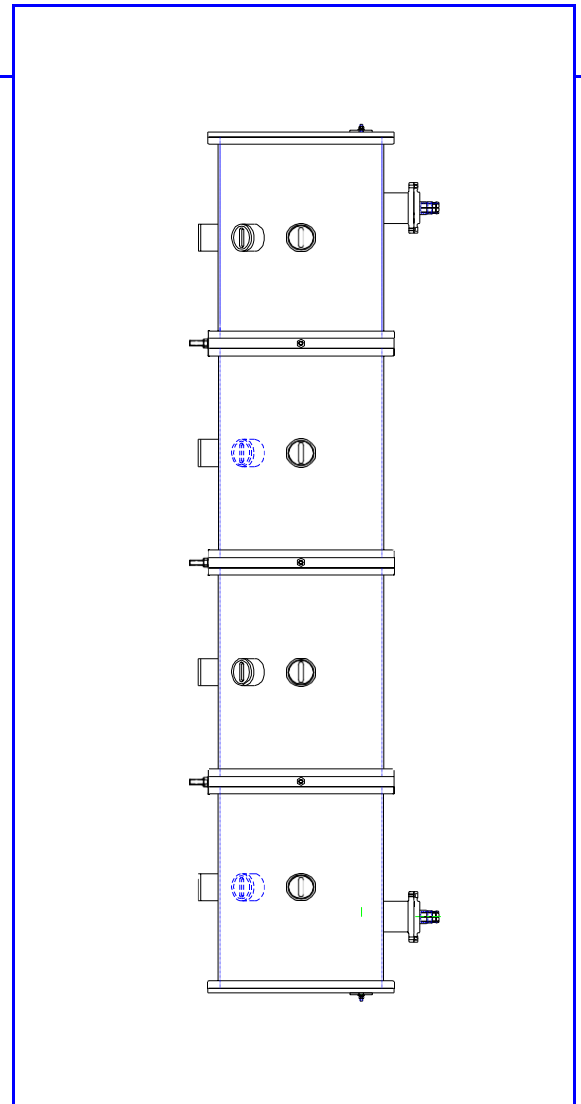

Micro Communications, Inc.

A MICROWAVE TECHNIQUES COMPANY

Microwave Techniques, LLC | 28 Sanford Drive, Gorham, ME 04038
Email: sales@microwavetechniques.com | Phone: 1-207-854-1700